

SafeLine SL2

*SL2

The three-point unit in a compact size with external possibilities

This compact unit is mounted easily with a screw terminal on the roof of the lift car and functions as a main unit with several possibilities for connections of voice stations, external pictograms and external alarm button.

Equipped with a complete three-point communication system, this means that two extra voice stations can be connected to the SL2 besides the one that is already integrated with the main unit, making connection of extra voice stations in the lift car and pit possible. This in combination with outputs for external pictograms and an external alarm button allows for wide flexibility to tailor the unit depending on the lift's conditions.

It is also easy to install a GSM-option for the SL2. The GSM unit, for instance a GL6, is also mounted on the roof of the lift car, which makes shifting between landline and GSM very easy without re-configurations.

Technical information

Connect two extra voice stations
Outputs for external pictograms
Screw terminal for flexible installation
Fulfil EN81-28 & -70
SafeLine ProLink compatible

Technical data

Emergency signal button

NO / NC

Inputs

10-30VDC

Effect


10-30VDC, 40-70 mA


Size (HxWxD)

90 x 171 x 42 mm

Weight

470 g

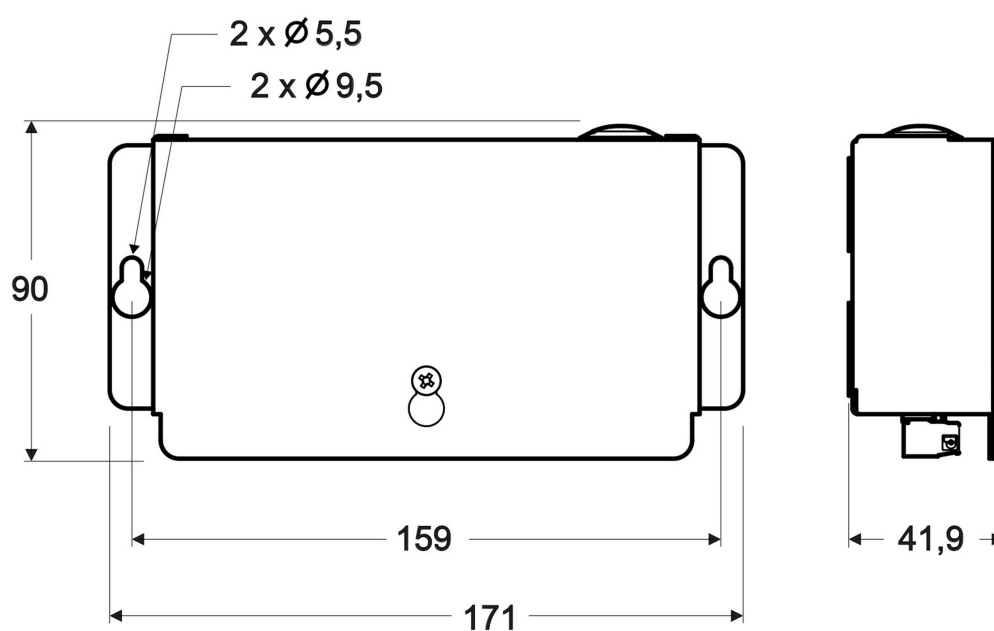

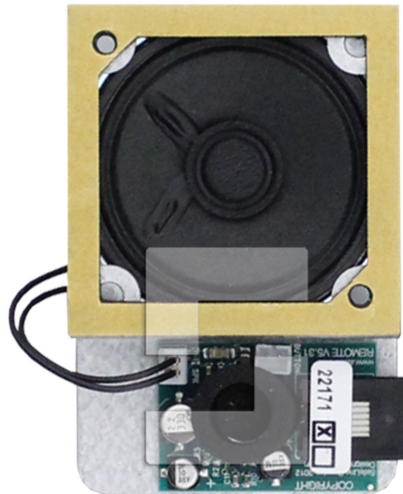

Voice station for COP mounting

*LT-STAT04

The voice station for discrete COP mounting


The compact voice station for SL1/SL2/SL4 with integrated speaker and microphone – offering great voice quality also in noisy or difficult ambience. The unit is discretely integrated in the car operating panel with almost no installation time, using the included flat cable (5m) with RJ12 connector.

Technical information

Speaker, microphone and button (NO)
NO button can be replaced with NC
5m flat cable with RJ12 connectors
included
Self-drilling screws included

Technical data

Size (HxWxD)
54 x 79 x 19 mm
Weight
170g

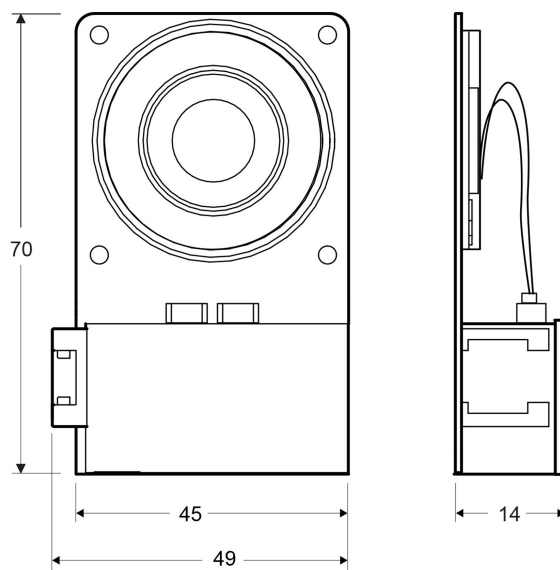



Voice station for surface mounting with alarm button

*LT-STAT02

Additional voice station for mounting below or on top of car

The voice station for mounting below or on top of car for SL1/SL2/SL4. Equipped with an integrated speaker, microphone and alarm button (NO). Quick installation by using the included 5-meter flat cable with the RJ12 connector and self-drilling screws.

Technical information

Speaker, microphone and button (NO)

NO button can be replaced with NC

5m flat cable with RJ12 connectors
included

Self-drilling screws included


Technical data


Size (HxWxD)

119 x 57 x 31 mm

Weight

250g

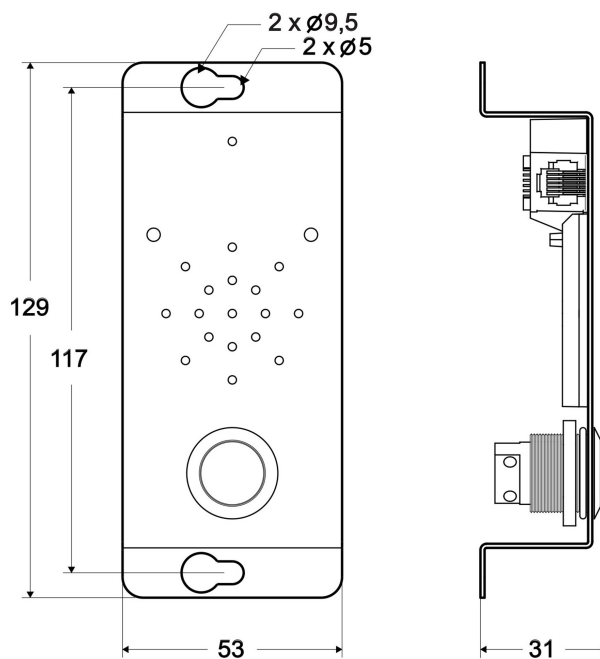

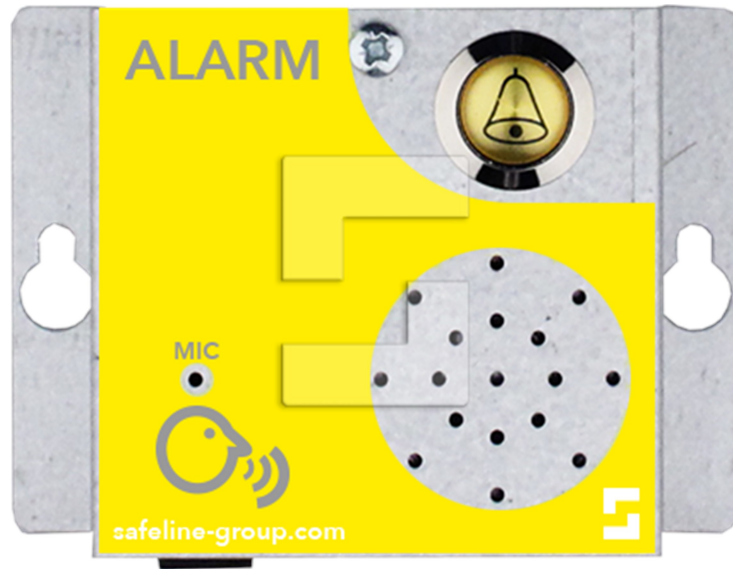

SafeLine voice station, surface mounting with alarm button, microphone & speaker

*LT-STAT05

Voice station for installation on wall or on top of/under car

The SL1/SL2/SL4 voice station for installation on wall or on top of/under car, equipped with integrated speaker, microphone and emergency button (NO). An easy all-in-one solution, quickly installed using the included 5-meter flat cable with RJ12 connector and self-drilling screws.

Technical information

Speaker, microphone and button (NO)

NO button can be replaced with NC

5m flat cable with RJ12 connectors
included

Self-drilling screws included


Technical data

Size (HxWxD)

79 x 105 x 32 mm

Weight

350g

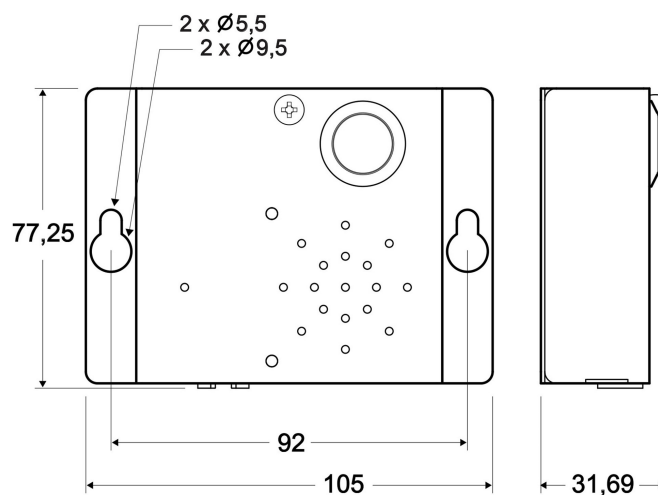



Alarm button for surface mounting with microphone

*LT-STAT01

Optional alarm button for mounting below or on the top of the car

The optional separate alarm button (NO) for the SL1/SL2/SL4 with integrated microphone – for mounting below or on the top of the car. Quick installation by using the included flat cable (5m) with the RJ12 connector and self-drilling screws.

Technical information

Microphone and button (NO)

NO button can be replaced with NC

5m cable included

Self-drilling screws included

Technical data

Size (HxWxD)

69 x 39 x 31 mm

Weight

190 g

