

### MAIN FEATURES


Miniaturized optical multiturn absolute encoder for high end application. Thanks to BiSS-C interface and high resolution it can be used in robotics, motor feedback and CNC machines.

- Optical sensor technology (OptoASIC + Energy Harvesting)
- 39 bit total resolution (23 bit single turn + 16 bit multiturn)
- Power supply +5 VDC with BiSS-C as electrical interface
- Cable output
- Blind hollow shaft diameter up to 8 mm
- Mounting by stator coupling
- Operating temperature -20° ... +105°C (-4° ... +221°F)




ORDERING CODE		AAM	38F	16	/	23	B	5	B	8	X	X	PR	.XXX
<b>SERIES</b>	absolute multiurn encoder	AAM												
<b>MODEL</b>	blind hollow shaft with stator coupling	38F												
<b>MULTITURN RESOLUTION</b>	bit	16												
<b>SINGLETURN RESOLUTION</b>	bit	23												
<b>CODE TYPE</b>	binary	B												
<b>POWER SUPPLY</b>	5 V DC	5												
<b>ELECTRICAL INTERFACE</b>	BiSS-C	B												
<b>BORE DIAMETER</b>	mm	6												
	(1/4") mm	6,35												
	mm	8												
<b>ENCLOSURE RATING</b>	IP 50	X												
<b>OPTIONS</b>	to be reported	X												
<b>OUTPUT TYPE</b>	radial cable (standard length 0,2m)	PR												
<b>VARIANT</b>	custom version	XXX												

AAM 38 F

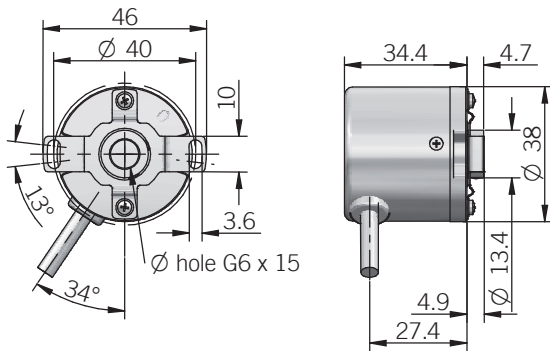

RECOMMENDED INTERFACE FLANGE DESIGN

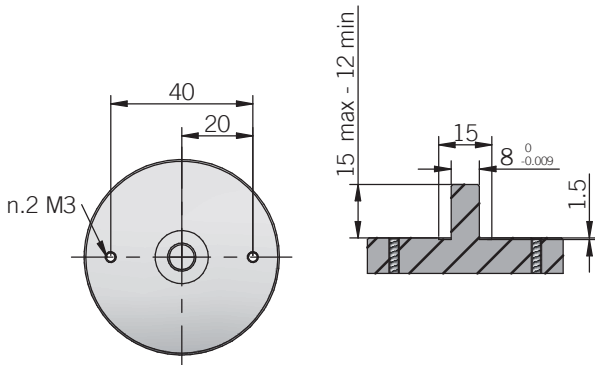

dimensions in mm

ELECTRICAL SPECIFICATIONS	
Multiturn resolution	16 bit
Singleturn resolution	23 bit
Fault status	8 bit
CRC	8 bit
Power supply <sup>1</sup>	4,75 ... 5,25 V DC
Current consumption without load	< 120 mA
Output type <sup>2</sup>	BiSS-C (SN65LBC179Q)
Code type	binary
Clock frequency (MA)	80 kHz ... 10 MHz
Position Calculation Time	Refer to BiSS-C T <sub>busy time</sub>
Counting direction	decreasing clockwise (shaft view)
Start-up time	500 ms
Accuracy	± 80 arc-sec
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2015/863/EU directive

CONNECTIONS	
Function	Cable
+ V DC	red
GROUND	black
SERIAL DATA (SLO) +	orange
SERIAL DATA (SLO) -	blue
SERIAL CLOCK (MA)+	brown
SERIAL CLOCK (MA) -	white

MECHANICAL SPECIFICATIONS	
Shaft diameter	ø 6 / 6,35 (1/4") / 8 mm
Enclosure rating	IP 50 (IEC 60529)
Max rotation speed	6000 rpm continuous
Shock	200 G, 6 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Shaft material	brass
Housing material	steel
Bearing stage material	aluminum
Bearings	n.2 ball bearings
Bearings life	10 <sup>9</sup> revolutions
Operating temperature <sup>3,4</sup>	-20° ... +105°C (-4° ... +221°F)
Storage temperature <sup>4</sup>	-20° ... +105°C (-4° ... +221°F)
Shaft radial play allowed	± 0,05 mm
Shaft axial play allowed	± 0,1 mm
Fixing torque for shaft grains	1 Nm recommended
Fixing torque for spring screws	0,35 Nm recommended for M3 screws (not provided)
Weight	150 g (5,29 oz)

<sup>1</sup> as measured at the transducer without cable influences

<sup>2</sup> for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section

<sup>3</sup> measured on the transducer flange

<sup>4</sup> condensation not allowed