

SafeLine 3000 PSTN **The two-part system that combines a lift telephone with intercom**

*SL3000

Aside from all the smart alarm functions users have come to expect from SafeLine, the SafeLine 3000 also comes with a built-in intercom function. This means that if more than one telephone is connected to the system, the telephones can be used for communication between the units, for example from the machine room to the lift pit.

Technical information

Intercom

Easy configuration with SafeLine Pro

Advanced alarm functions

Wide range of voice stations

Technical data

Battery

12V, 0.8Ah

Relay

1 A/30 VDC

Inputs

10-30 VDC, 5mA

Effect


230VAC, 4-7 W


Size (HxWxD)

172 x 226 x 46mm

Weight

1710g

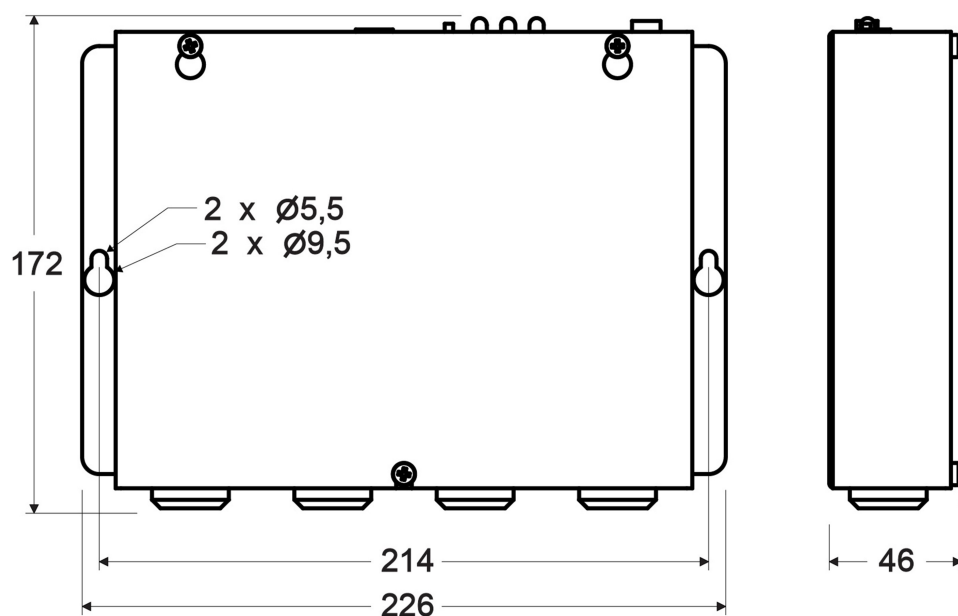

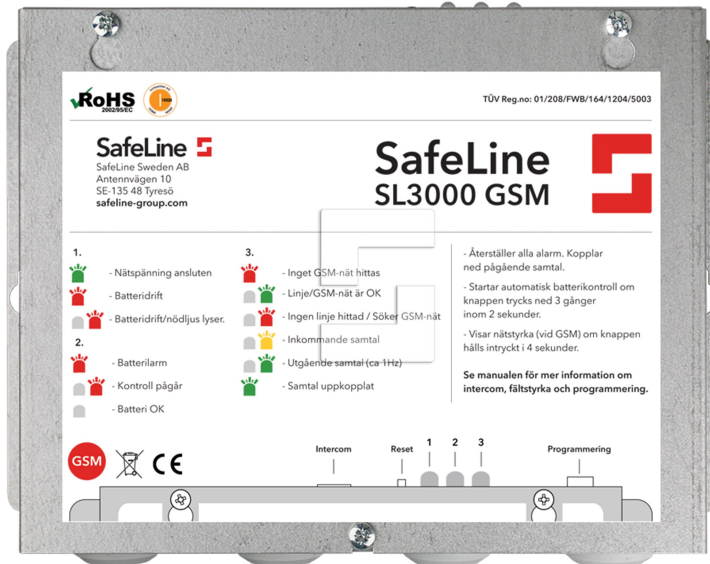

SafeLine 3000 GSM 2G

*SL3000 GSM

**The two-part system that combines
a lift telephone with intercom**

Aside from all the smart alarm functions users have come to expect from SafeLine, the SafeLine 3000 also comes with a built-in intercom function. This means that if more than one telephone is connected to the system, the telephones can be used for communication between the units, for example from the machine room to the lift pit.

Note: the GSM interface requires software version 2.20 or later

Technical information

Smooth changing between GSM and PSTN

Intercom

Easy configuration with SafeLine Pro

Advanced alarm functions

Wide range of voice stations

Technical data

Battery

12V, 0.8Ah

Relay

1 A/30 VDC

Inputs

10-30 VDC, 5mA

Effect


230VAC, 4-7 W


Size (HxWxD)

172 x 226 x 46mm

Weight

1850g

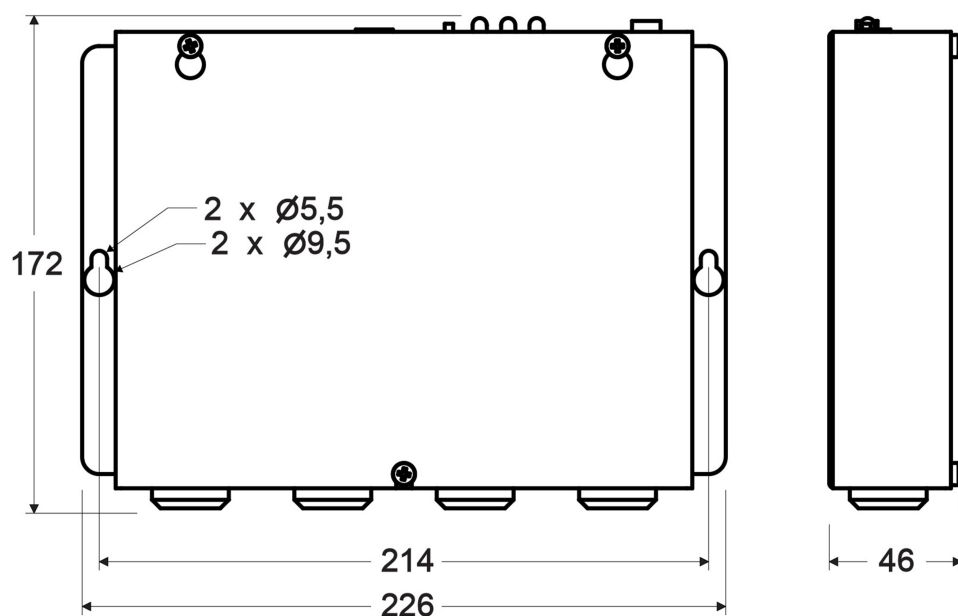

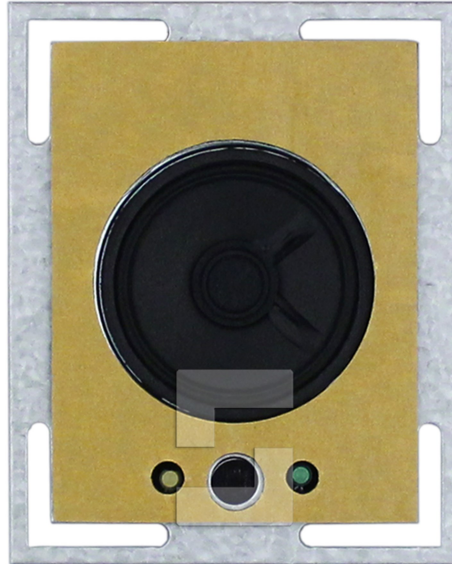

SafeLine 3000 voice station, COP mounting

*SLREM_COP

SafeLine 3000 Car Station COP

SafeLine 3000 voice station for mounting behind COP. The front plate is made for customized installation on welded bolts or with adhesive tape. Circuit board with microphone, speaker and LED indicators for pictograms. 5 meter flat cable RJ45 included.

Technical information

Flexible installation behind car operating panel

Mount on bolts or with the attached adhesive tape

Green and yellow LED's for pictograms

Connect external pictograms and emergency button

Adjustable speaker volume

Technical data

Power supply (pictogram LED's)

12V, 2x25 mA

Included cable length


5m

Size (HxWxD)

100 x 80 x 18mm

Weight

290g

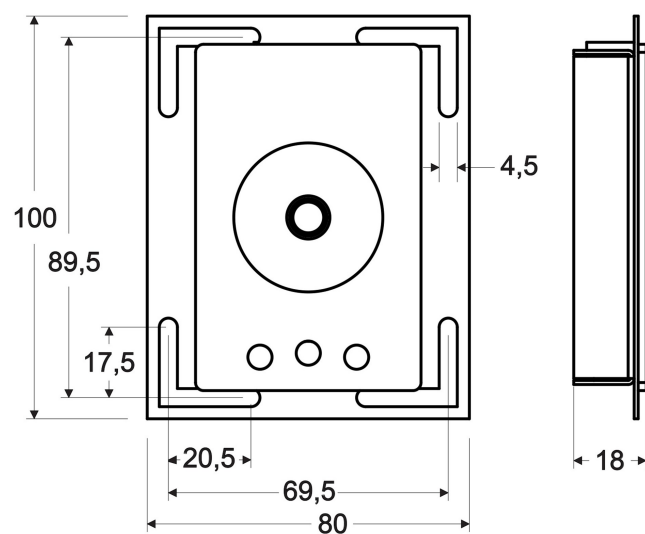



SafeLine 3000 voice station, surface mounting with alarm button

*SLREM_V3PICB

SafeLine 3000 voice station with emergency button for surface mounting.


The front plate is produced in stainless steel and has pictogram engravings. Circuit board with microphone, speaker and LED indicators for the pictograms. 5 meter flat cable RJ45 is included.

Technical information

Front plate in stainless steel with engraved pictograms
Emergency button (NO)
Self-test on a regular basis
Status indicators (green and yellow LED's)
Adjustable speaker volume
5m flat cable RJ45 included

Technical data

Power supply (pictogram LED's)
12V, 2x25 mA
Included cable length
5m
Size (HxWxD)
130 x 78 x 20 mm
Weight
340g

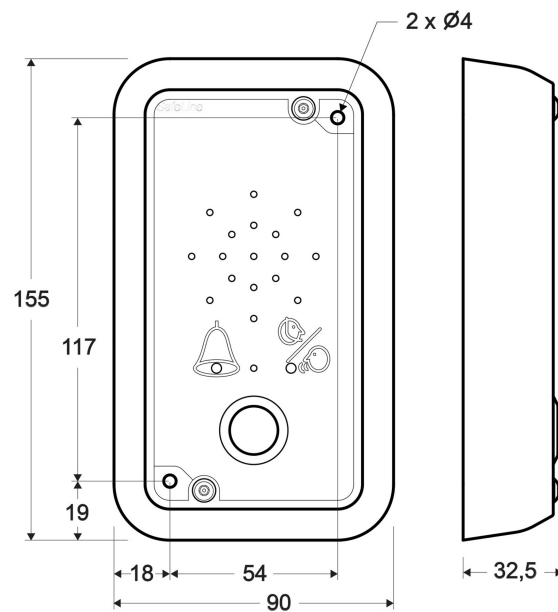



SafeLine 3000 voice station, without plate

SafeLine 3000 voice station without front plate for mounting behind COP.

*SLREM_COP2

Customized for installation behind COP with limited space or where welded bolts are missing. The unit is mounted with the included double sided adhesive tape. Circuit board with microphone, speaker and LED indicators for pictograms. 5 meter RJ45 flat cable is included.

Technical information

Flexible installation behind COP
Mounted with double sided adhesive tape
Green and yellow LED's for pictograms
Connect external pictograms and emergency button
Adjustable speaker volume

Technical data

Power supply (pictogram LED's)


12V, 2x25 mA

Included cable length

5m

Size (HxWxD)

86 x 54 x 15 mm

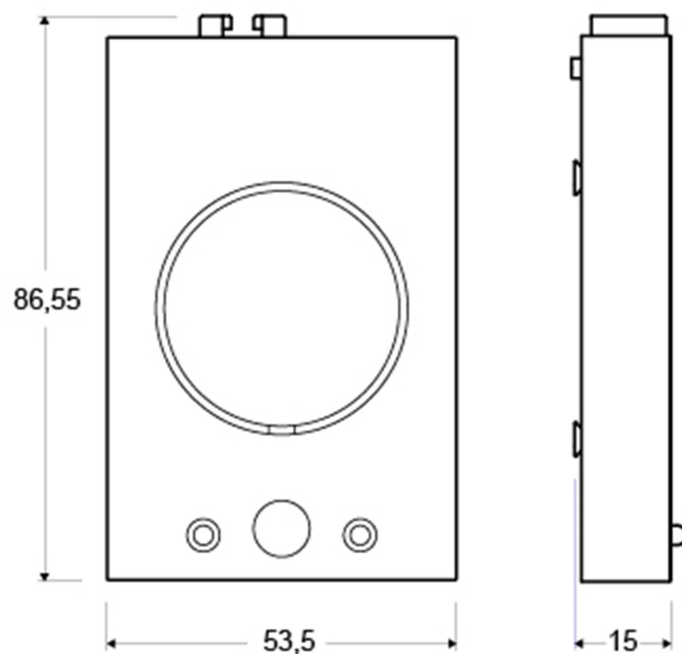



SafeLine 3000 voice station, surface mounting with with LED pictograms

SafeLine 3000 voice station for surface mounting.

The front plate is produced in stainless steel and has pictogram engravings. Circuit board with microphone, speaker and LED indicators for the pictograms. 5 meter flat cable RJ45 is included.

*SLREM_V3-PIC

Technical information

5m flat cable RJ45 included

Pictogram engravings

Speaker and LED indicators for the pictograms

Technical data

Power supply (pictogram LED's)

12V, 2x25 mA

Included antenna cable length


5m

Size (HxWxD)

130 x 78 x 20 mm

Weight

340g

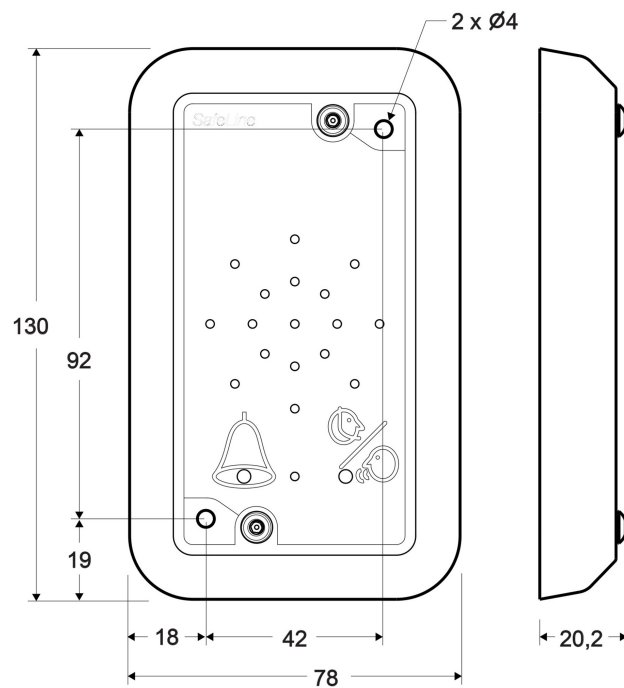



SafeLine 3000 voice station, for car top/lift pit

*SL3000-XREMOTE

Extra Station for SafeLine 3000 (top of car / lift pit).

Additional voice station for SafeLine 3000. Microphone, speaker and button enable communication from outside the car.

Robust metal housing for installation on car roof, under the car or in the shaft. Mount with screws or on a mounting plate (Art.No:SL3000_XRemPlate).

Self-drilling screws are included in the delivery.

Please note!

To install additional voice stations, the SafeLine 3000 main unit must be upgraded with a controller board (Art.No: SL3000_XRemBoard).

Technical information

Extra station for SafeLine 3000 with microphone, speaker and button

NO button as standard but possible to replace with NC

Robust housing for installation on top of car, below car or in the shaft

Surface mounted

Status indicator (red LED)

Self-drilling screws included

5 m cable included

Technical data

Included cable length


5m


Size (HxWxD)

147 x 74 x 33 mm

Weight

480g

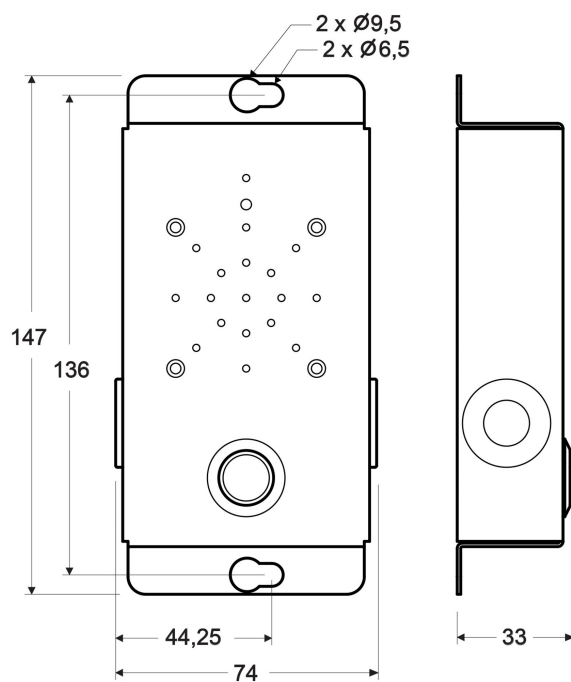

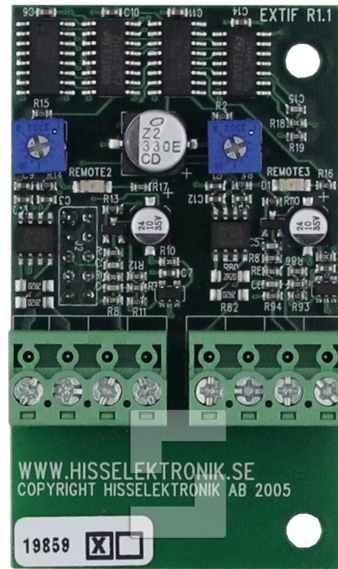

SafeLine 3000 board, Extra station board for lift pit and car top stations for extra voice stations

*SL3000_XREMB

Expansion board for connecting additional voice stations to SafeLine 3000.

Install the expansion board in the SafeLine 3000 main unit and connect up to two extra voice stations for use above or under the car.

Delivered in a box with mounting screws.

Technical information

Connect extra voice stations to
SafeLine 3000

Easy installation in the SL3000 main
unit

Up to two extra voice stations for
mounting above or below car

Mounting screws included

Technical data

Size (HxWxD)

74 x 43 x 20 mm

Weight

60g

